

FINGER JOYSTICK MJ-F12 (prev. MJ-2K)

The MJ-F12 series with potentiometer technology is characterized by precise control and low power consumption.

The 1-, 2- or 3-axis joystick is available in numerous variants.

The MJ-F12 and MJ-F13 series differ in their flange shape. The MJ-F12 has a square flange.

Advantages

- Robust and compact design
- Low weight
- Low installation depth
- Low power consumption

Application examples

- Remote Controls
- Boat controls
- Forklifts
- Aerial work platforms

Electrical data	
Sensor technology	Potentiometer
Resistance value	1.75 kΩ, 2.5 kΩ, 5 kΩ, 10 kΩ Others on request
Supply voltage	3 – 30 VDC
Tolerance center position	±0.5 % to ±1.5 % FSO
Tolerance max. deflection	±1 % bis ±2.5 % FSO configuration-dependent
Wiper current	≤ 1 mA max. 5 mA in case of malfunction
Independent Linearity	±2 %
Interface	Potentiometer 0 – 100 % Potentiometer 10 – 90 % Potentiometer 7.5 – 92.5 % Potentiometer for detent steps, digital Potentiometer Gray Code and center contact
Resolution	Analog

Electrical connection	
	Solder connection Hirose DF3 12 pole Molex PicoBlade 53048 Amphenol Dubox 6 oder 8 pole Others on request

Environmental data	
Operating temperature	-25 °C to +70 °C -40 °C optional
Storage temperature	-40 °C to +85 °C
Protection level acc. to IEC 60529	IP 67 above sealing
EMC Immunity acc. to	EN IEC 61000-6-2
EMC Emission acc. to	EN IEC 61000-6-4

Mechanical data	
Number of axes	1, 2 or 3
Dimensions	See drawings
Weight	approx. 25 g
Operating force	5 N ±1,5 N 3 N optional
Max. vertical load	< 500 N
Max. tilt load	< 200 N
Deflection angle X and Y	±26° Others on request
Deflection angle Z	±37°
Centering	Single spring
Mounting	M2.5 x 16 for 3 mm mounting plate, mounting ring Screwed from below
Mechanical option	Spring return to center Spring return to center, reduced operating force Detent steps, spring return to center Detent steps, locking Stepless locking
Limiter	Square Square, soft guided feel Round Round, soft guided feel Cross gate Single axis in X or Y
Lifetime	> 5 million cycles

Material	
Housing	Aluminium
Bearing	Stainless steel/plastic
Rubber boot	Neoprene
Handle	Plastic


Handle design	
	Handle length 55 to 70 mm Handle with rubber boot, closed Handle with rubber boot, open

Handle function	
	Push button / Deadman switch, internal Push button / Deadman switch, external


FINGER JOYSTICK MJ-F12 (prev. MJ-2K)

Dimensions


3-axis, Z-axis with rubber boot

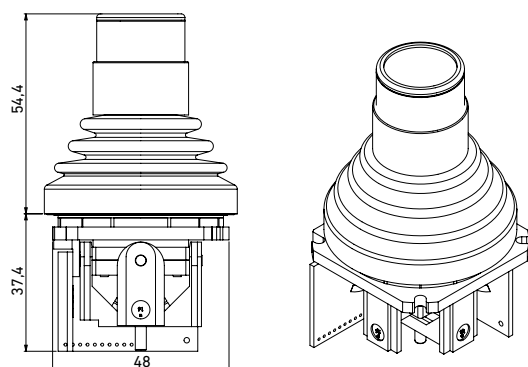


3-axis, Z-axis with ribs

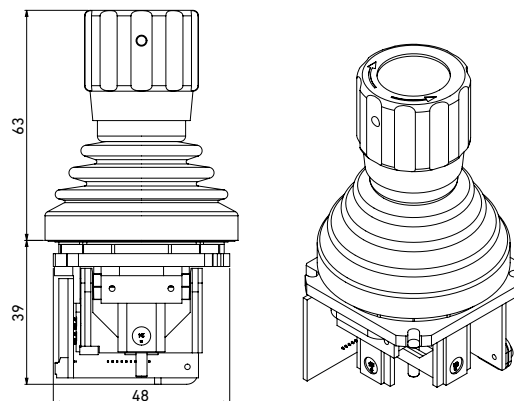


Integrated push button

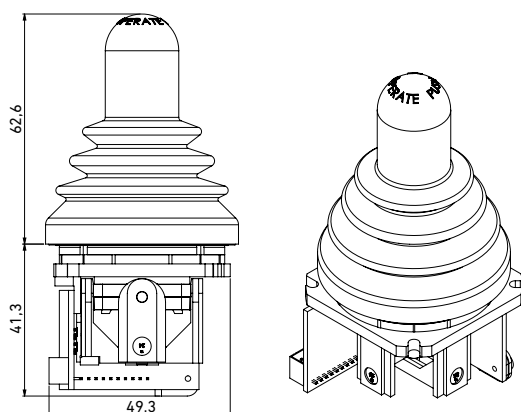


External push button

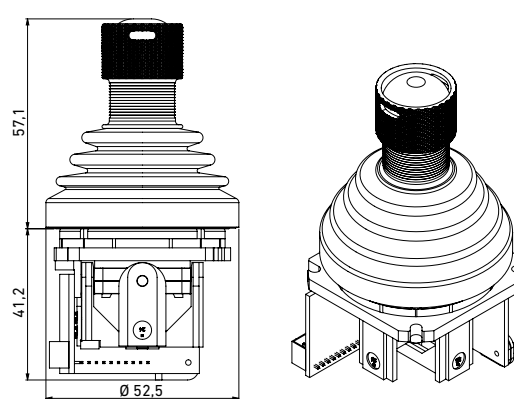

Without push button

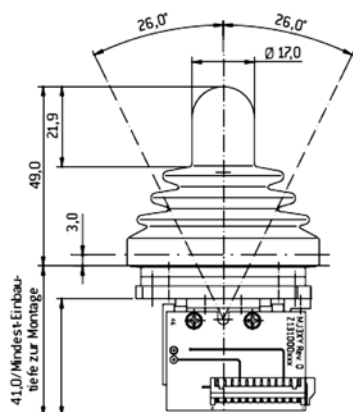

Mounting/Mounting Cutout

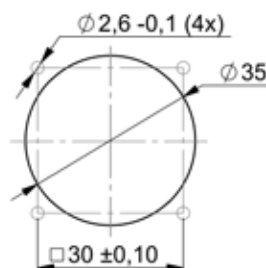

All dimensions in mm

Metallux cannot picture the customer's operating and application conditions and the customer's existing environmental influences. We therefore recommend that you carry out your own investigations into the planned use of the products under the actual operating conditions.

We continuously improve our products and also update our data sheets regularly. In this respect, there may be changes in the specification. These changes will apply to orders received by us from the time of the update, unless otherwise agreed.

Our products comply with Directive 2011/65/EU (RoHS) including Directive 2015/863/EU and Regulation (EC) No. 1907/2006 (REACH).

